

MANDURAH

PO Box 2215
MANDURAH WA 6210
Tel: (08) 9535 5833
Email: admin@besurveys.com.au

BUNBURY

PO Box 1148
BUNBURY WA 6230
Website: www.besurveys.com.au

Date:15-06-2026

Attention: Adam Riley
SRG Global

SURVEY RESULTS

COV-TEN-CON 514 stack raise works

TOWER 1 Module 4 column top position (Final)

Method.

Locale control points used to establish the position of the instrument (Leica MS50 +/-1mm)

3 points were recorded on each column at the top flange.
These were from 3 instrument positions.
The center was calculated for each column from these 3 measurements.

The center of the tower could then be calculated from these 3 column centers.

Column to column design distance = 5m
C14-005-100-MPD-105

Measurements

Column 10



Pt1 E:262.907 N:384.158 RL:77.174
Pt2 E:262.588 N:384.408 RL:77.172
Pt3 E:262.344 N:384.171 RL:77.173
T10 E:262.625 N:384.126 RL:77.173

Column 11

Pt4 E:257.908 N:384.201 RL:77.177
Pt5 E:257.623 N:384.401 RL:77.174
Pt6 E:257.350 N:384.159 RL:77.176
T11 E:257.634 N:384.114 RL:77.175

Column 12

Pt7 E:260.414 N:388.462 RL:77.177
Pt8 E:260.090 N:388.733 RL:77.173
Pt9 E:259.839 N:388.465 RL:77.174
T12 E:260.126 N:388.447 RL:77.175

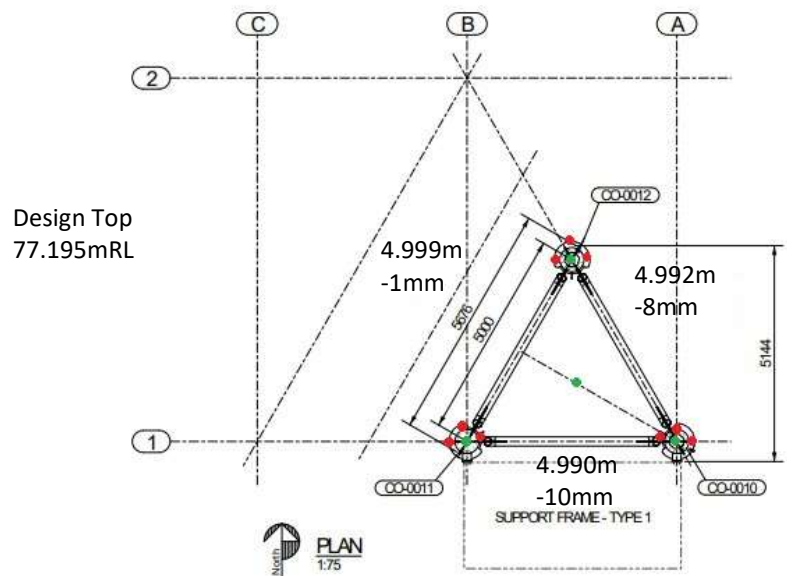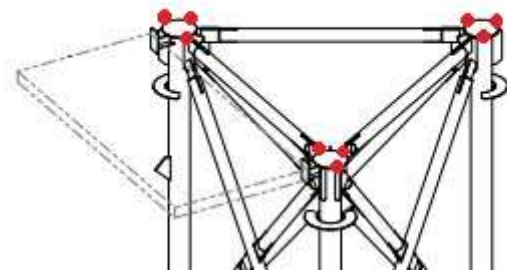

T10-T11-T12 center

Asbuilt Center of Module 4 at top = **E260.126 N:385.564 (+/-2mm)**
Asbuilt Center of base = **E260.111 N:385.564**
Difference = **dE:+15mm dN:+0mm**

15mm Lean to E / 72.62m
Tolerance 38mm/100m
C14-005-STR-DRG-101 Note 7

Chris John
BE SURVEYS